



MADE
IN
INDONESIA

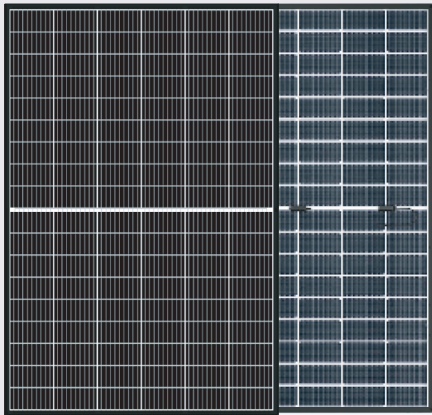

RSSEA8V430M-DG

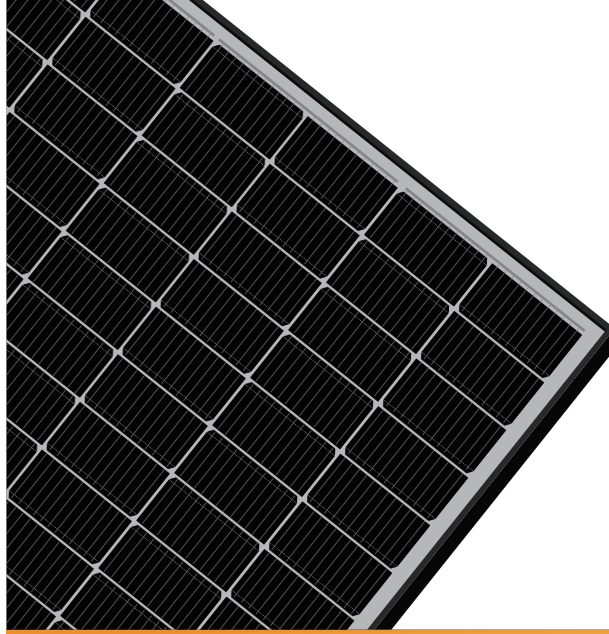

Fire class C

Consist of double-glass, with special design cells. Outstanding anti-PID performance.



Elegant appearance & high performance

The bifacial module is of high light transmittance to ensure good performance, an advanced solution that enables more energy generation, light capturing and elegant appearance.



1500V system voltage

Maximum 1500V DC system voltage , excellent insulation performance and lower total system cost.



Double-sided power generation, higher income

The dual-glass module has a double-sided ratio of up to 80% gain of 7%-25% on the back side.

108 Cells

Mono Half-Cut Bifacial
Double Glass Module

430W

Power output


22.02%

The Highest Efficiency

± 3%

Isc, Voc, Pmax Tolerance

WARRANTIES

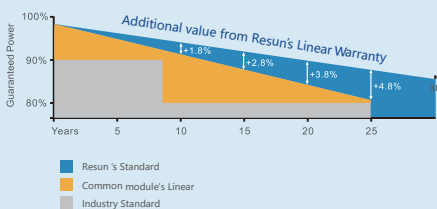

12 years

Product warranty on materials and workmanship

30 years

Linear power output warranty

CERTIFICATES

IEC61215/61730




RSSEA8V430M-DG




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

ASSEMBLY DRAWING (Unit:mm)

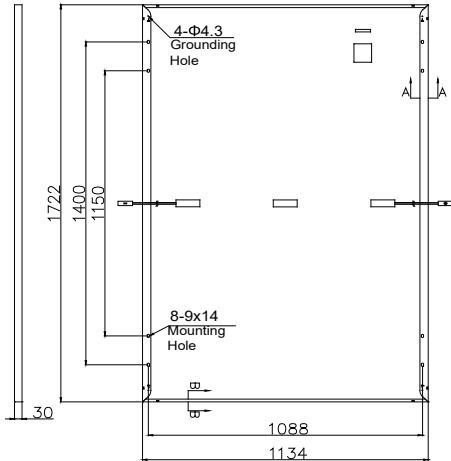


I-V CURVES

Test temperature 25°C

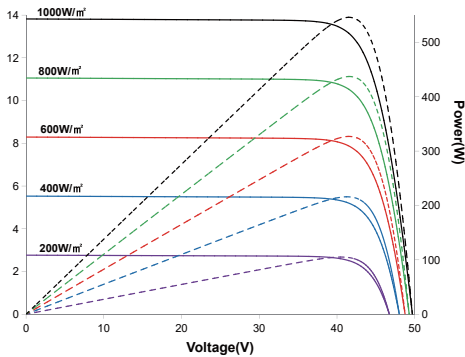

Irradiance: AM1.5, 1000W/m²

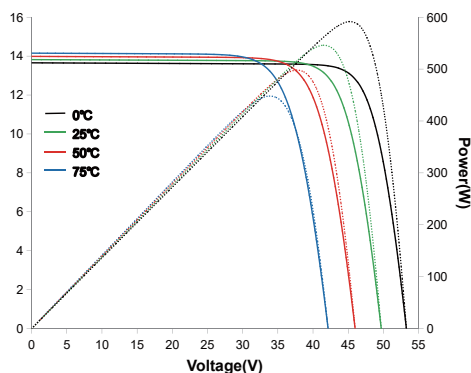

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	430
Open Circuit Voltage-Voc(V)	38.60
Short Circuit Current-Isc(A)	14.18
Maximum Power Voltage-Vmp(V)	32.15
Maximum Power Current-Imp(A)	13.38
Module Efficiency	22.02%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	326
Open Circuit Voltage-Voc (V)	36.17
Short Circuit Current-Isc(A)	11.46
Maximum Power Voltage-Vmp(V)	30.16
Maximum Power Current-Imp(A)	10.81

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

INTEGRATED POWER @STC(REFERENCE TO 10%)

Rated Power in Watts-Pmax(Wp)	473
Open Circuit Voltage-Voc(V)	38.60
Short Circuit Current-Isc(A)	15.60
Maximum Power Voltage-Vmp(V)	32.15
Maximum Power Current-Imp(A)	14.72
Module Efficiency	24.22%
BNPI/Isc(BSI)	17.58

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm
Cell configuration	108cells(6*18)
Module dimensions	1722*1134*30mm
Weight	23.8kg
Frame	Anodised Aluminum
Front Cover	2.0+2.0mm Tempered Glass
J-BOX	IP68, 3 bypass diodes
Cable	4.0mm², 300mm

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmp	-0.30%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1000V(DC)/1500V(DL)
Max Series Fuse Rating	30A
Max. Wind Load / Snow Load	2400pa/5400pa
Fire Rating	Class C, Type 29

PACKAGING CONFIGURATION

Container 40'HQ	936pcs
Quantity / Pallet	36pcs

Manufacturing Base: TUNAS KABIL INDUSTRIAL ESTATE, Desa/Kelurahan Batu Besar, Kec. Nongsa, Kota Batam, Provinsi Kepulauan Riau